



Sony Walkman NWZ-S764 LCD Screen Replacement

Guide to replace LCD screen.

Written By: Matthew Olson



INTRODUCTION

This tutorial will guide you in replacing the LCD display and cover.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
 - [iOpener](#) (1)
-

Step 1 — Removing the back cover



- Remove the two black 6.4mm Phillips screws from the back of the device.

Step 2

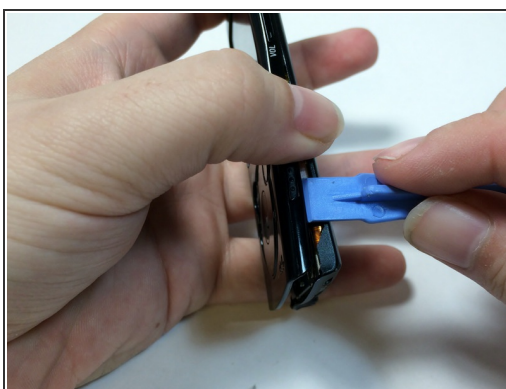


- Using a plastic opening tool, work your way around the edges of the device, carefully prying off the front panel.

Step 3




- Remove the two 2.8 mm phillips screws located on either side of the device near the top.

Step 4

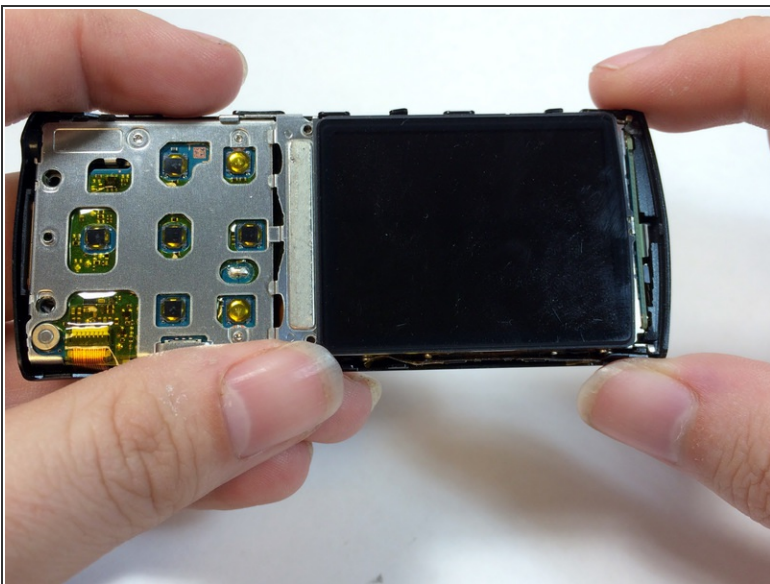

- Carefully pull the top piece away from the device.


Step 5 — Removing the Bluetooth module

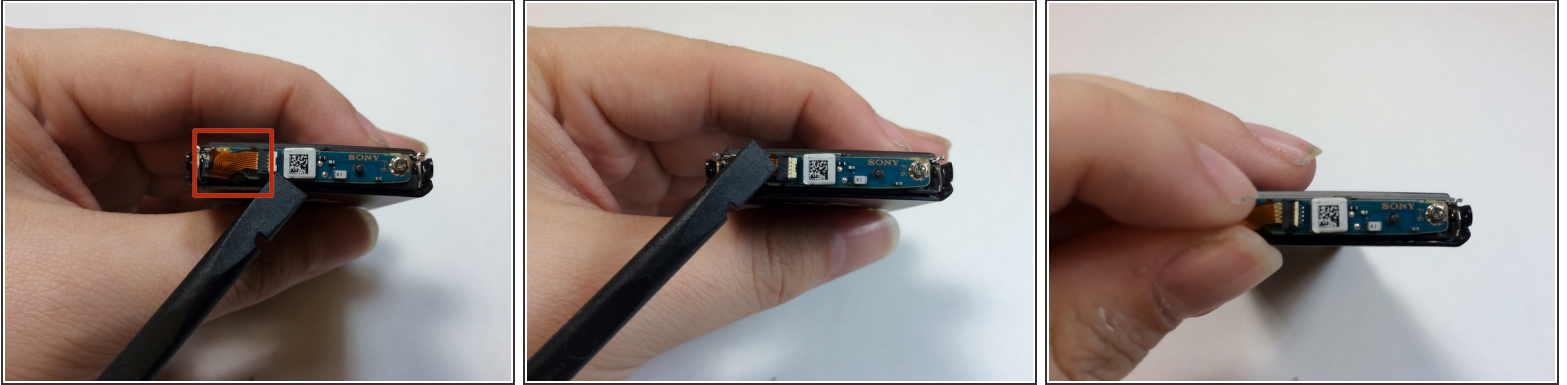

- Use the flat end of the spudger to flip up the retaining flap for the bluetooth module.

⚠ Be sure to lift up on the retaining flap, and not the socket itself.

Step 6



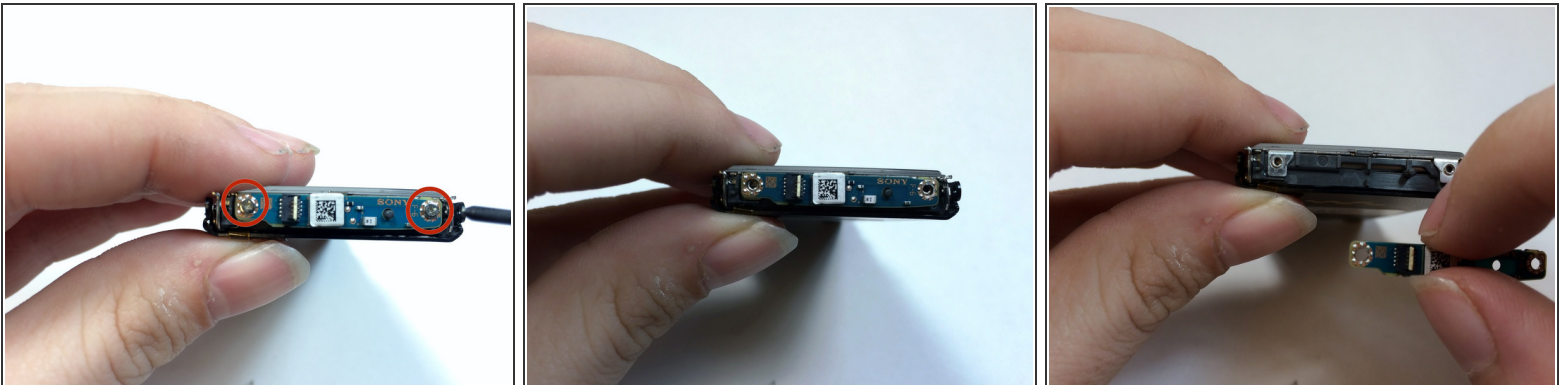


- Remove the two 1.8mm silver Phillips screws on the Bluetooth module.

- Lift up on and remove the Bluetooth module.




ⓘ The ribbon cable must first be removed in order to access the highlighted screw.

Step 7 — Audio Port

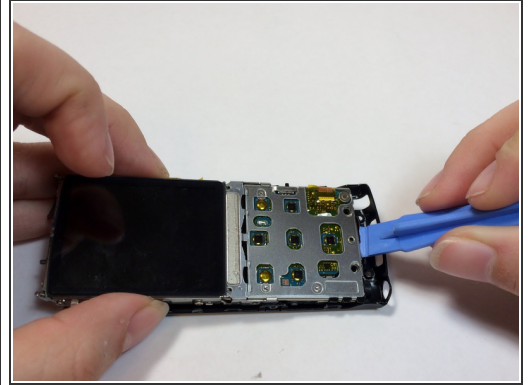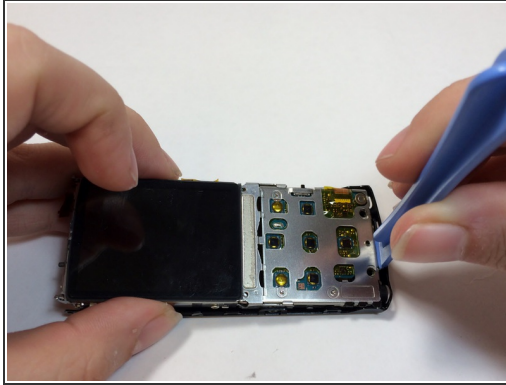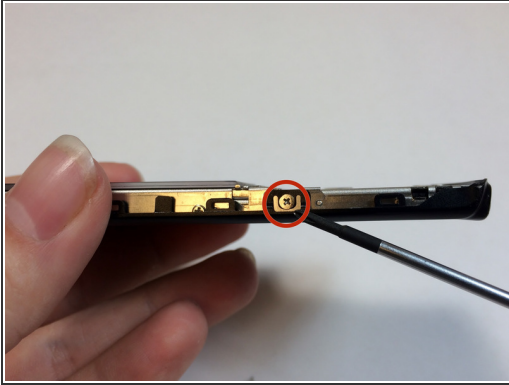


- Remove the two 2.8mm silver Phillips screws on the sides of the frame.
- ⓘ The two 2.8mm screws are on each side of the device.
- Insert a plastic prying tool between the bottom of the case and the motherboard.
- Pry up the assembly and lift it away from the case.

Step 8

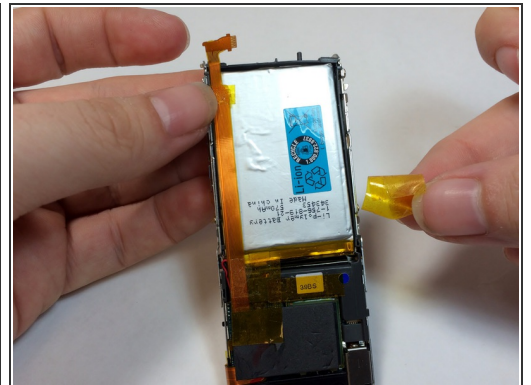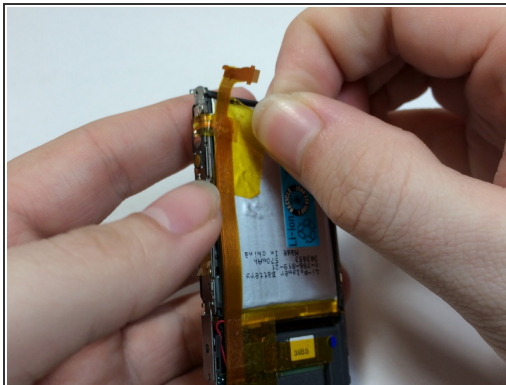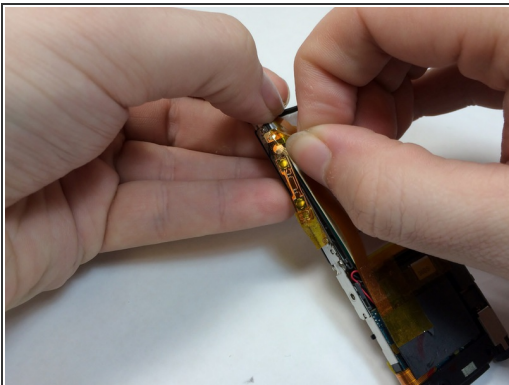

- Remove the yellow tape from the battery and volume control module.
- ⓘ Save tape for reassembly.


Step 9

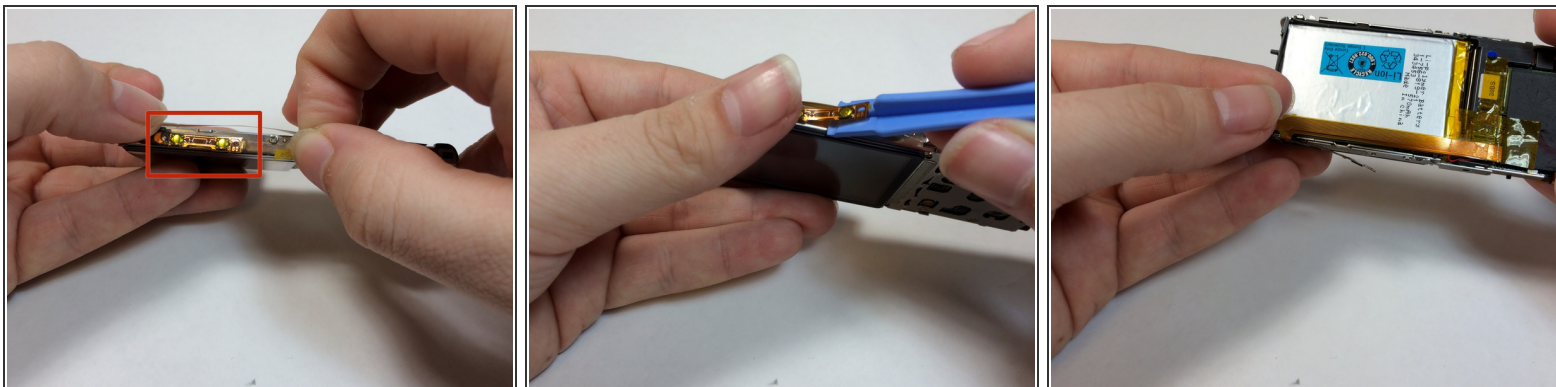

- Use a prying tool to pry under the volume control module.


⚠ This module is glued on, using too much force may damage or warp the module.

Step 10

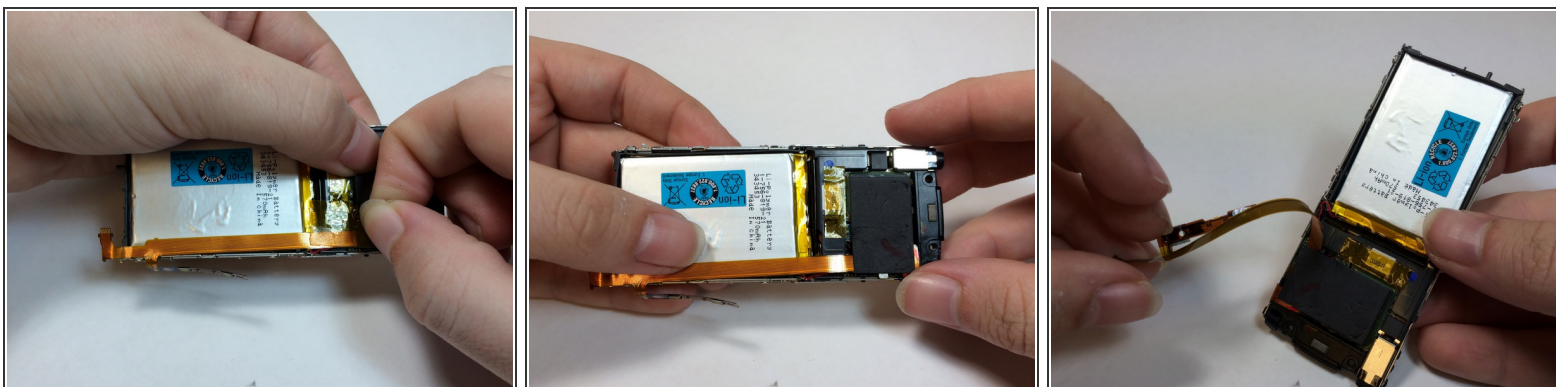

- Remove the tape from EMF shield and the LCD housing.
- Lift up on the volume control ribbon.

Step 11

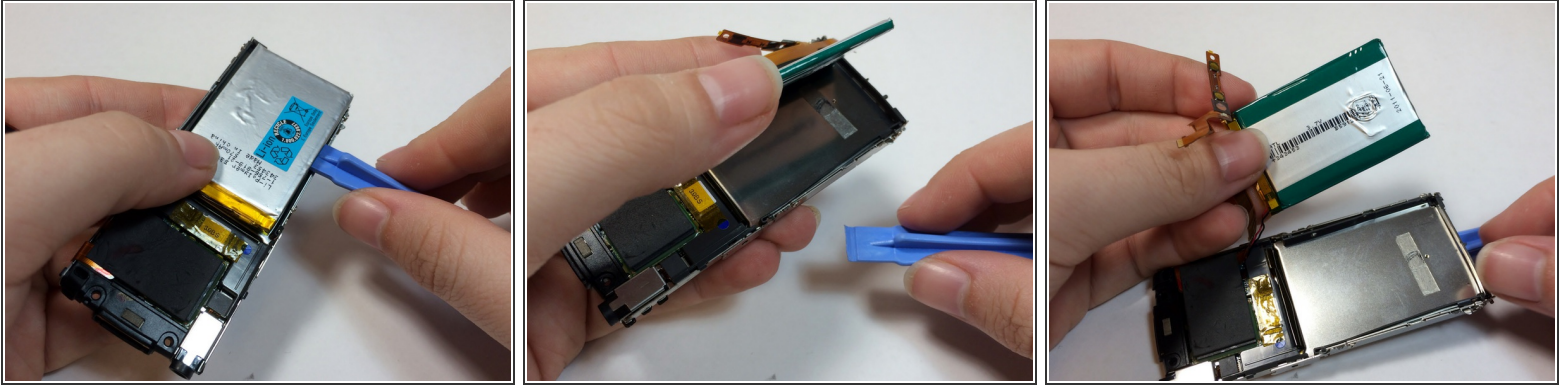


- Insert a plastic opening tool under the battery and lift up to remove it.

⚠ The battery is glued on, too much force may damage the battery casing.

⚠ The battery is soldered to the motherboard, care should be taken to not place too much stress on the wires.


Step 12

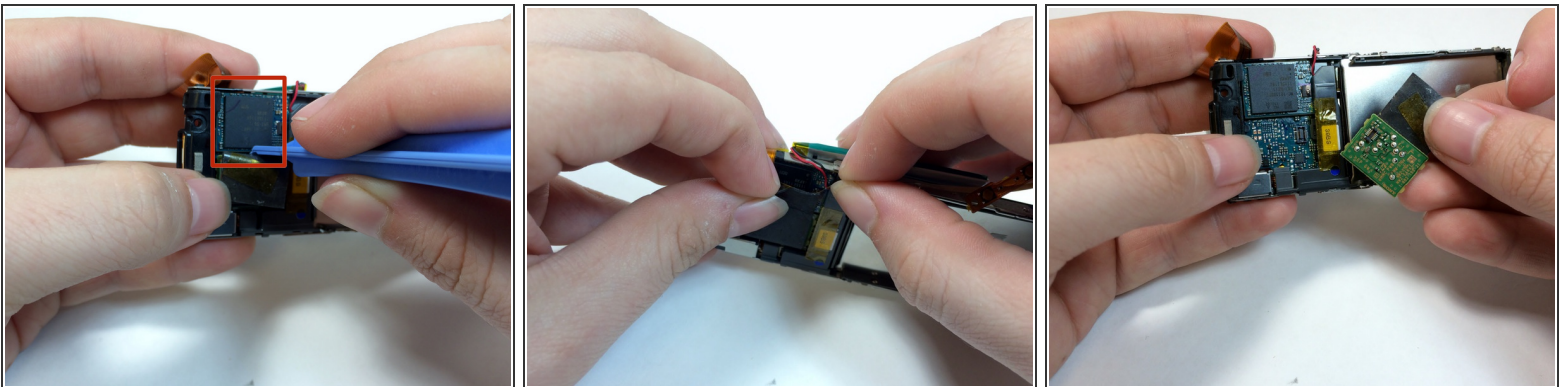

- Remove the black shielding tape from above the Hard Drive.
- Peel the foam cover away from the hard drive.
- Use a plastic opening tool to remove the EMF chip from the motherboard.


⚠ The hard drive is soldered onto the device. Be careful not to pull too hard on the hard drive.

Step 13

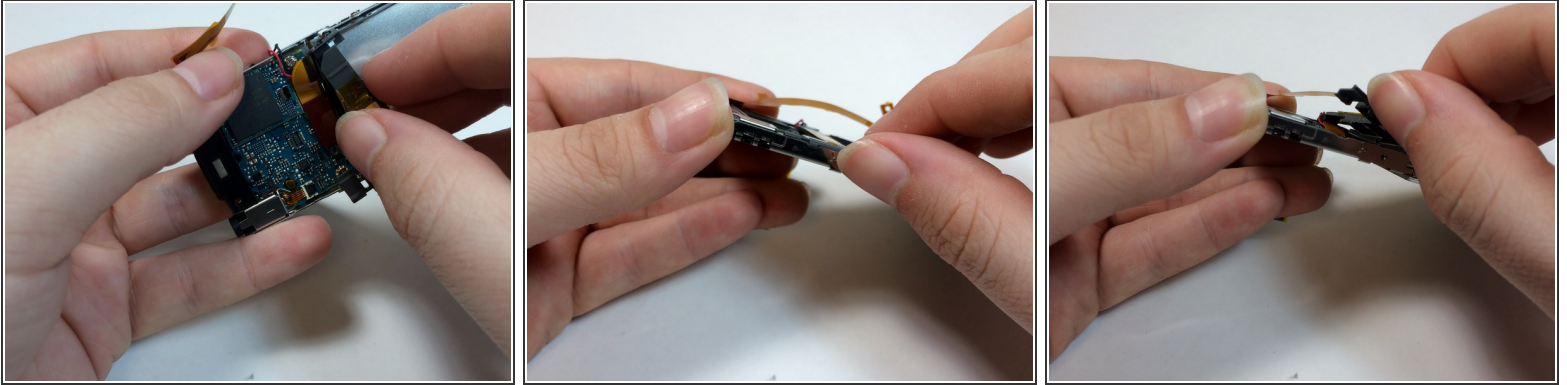


- Remove the plastic bracket by pushing up with your thumb to expose the display connection.

Step 14

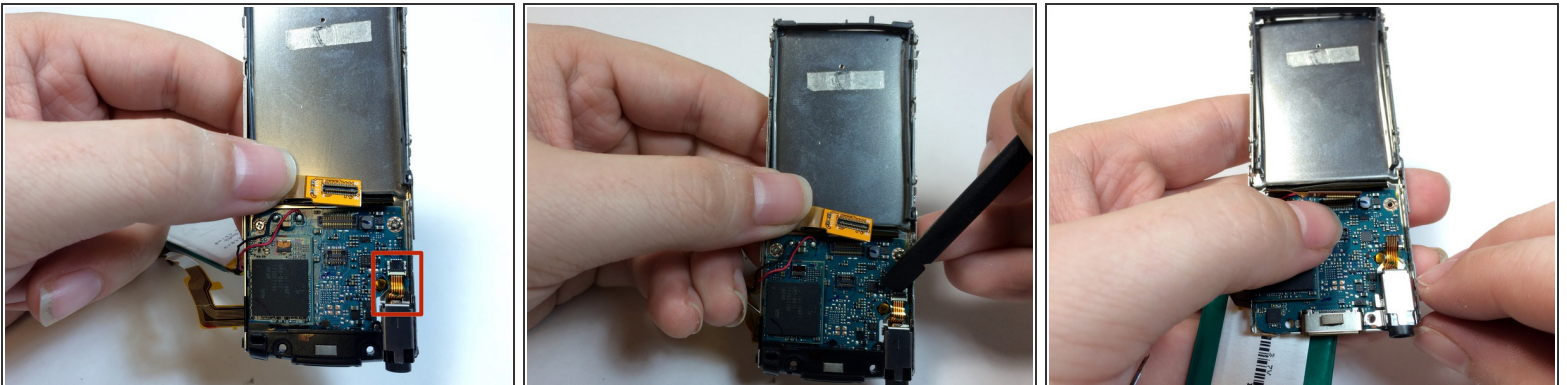




- Use the flat end of a spudger to flip up the retaining flap on the audio jack module.

Step 15

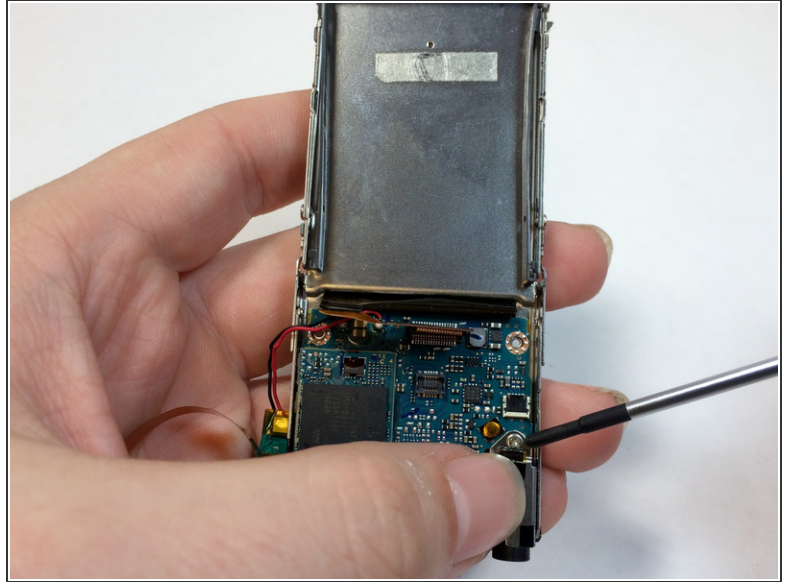



- Peel back the ribbon for the audio jack and remove the 1.8mm silver Phillips screw.

Step 16

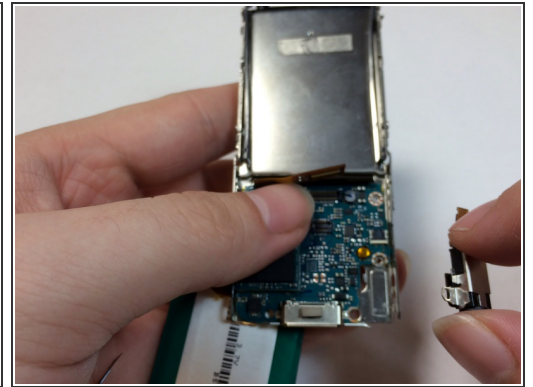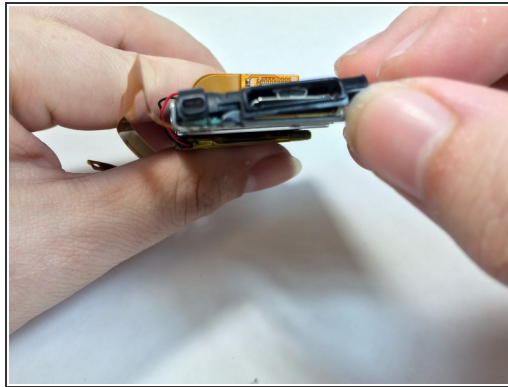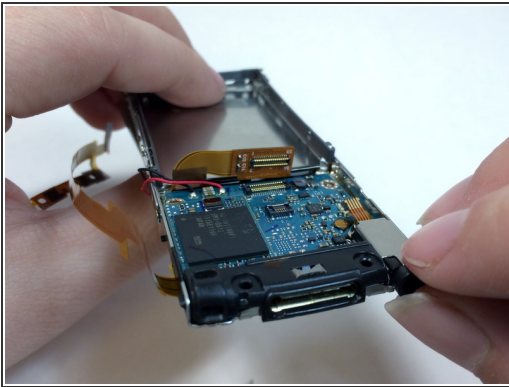


- Remove the mic casing by pushing up and in.
- Remove the headphone jack and the bottom casing.

Step 17 — Motherboard

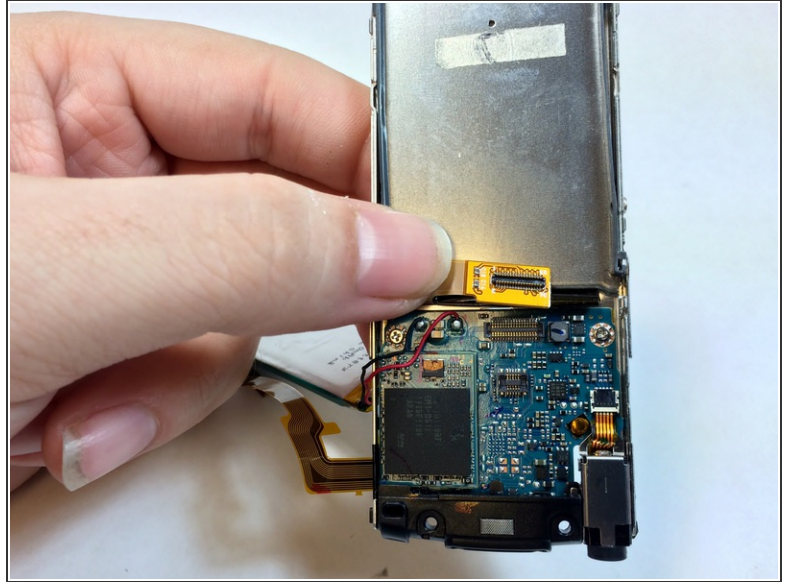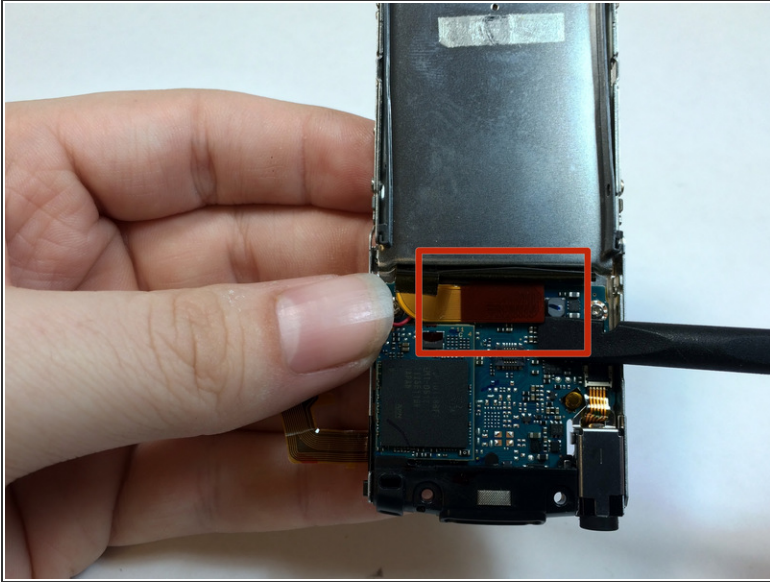


- Use the prying tool to remove the LCD ribbon wire.

Step 18

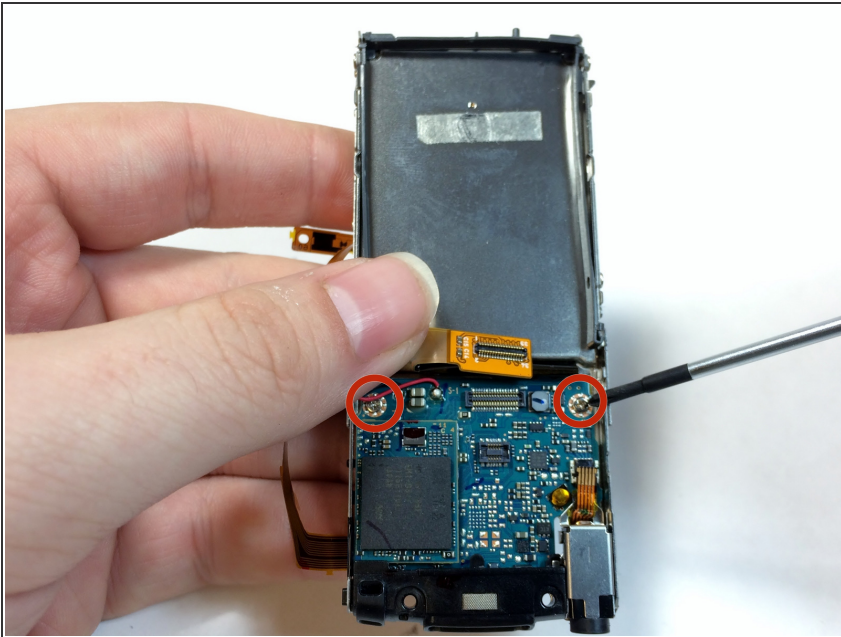


- Lift up on the LCD ribbon and remove the two 1.8mm silver Phillips screws.


Step 19

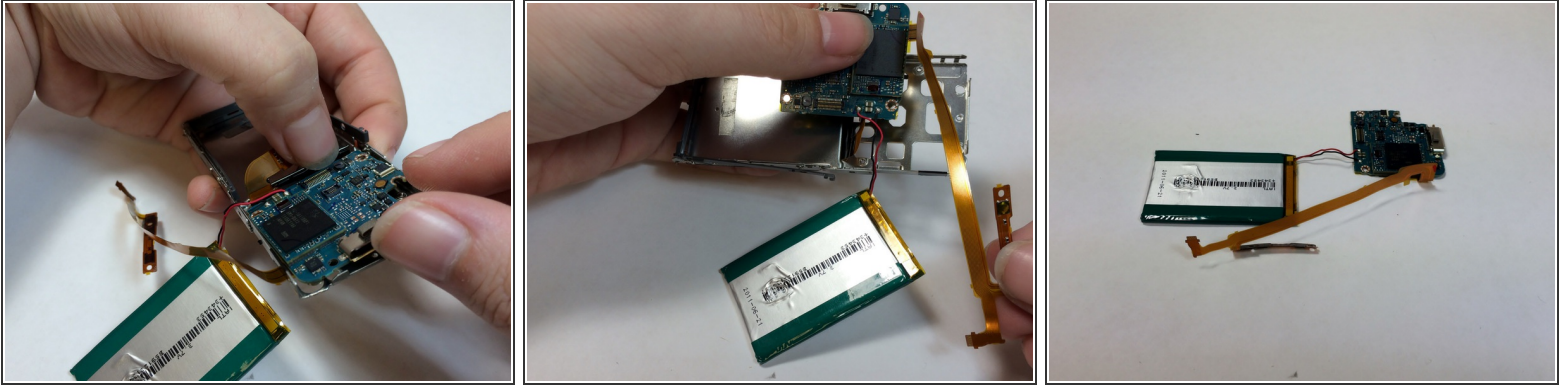

- Lift the motherboard away from the frame with your thumb to remove it from the device.
- Pull the volume control module through the space in the frame.


 If you are using the magnetic project pad or other magnetic surface to keep your screws, do not place the hard drive on or near the magnet.

Step 20 — LCD Screen

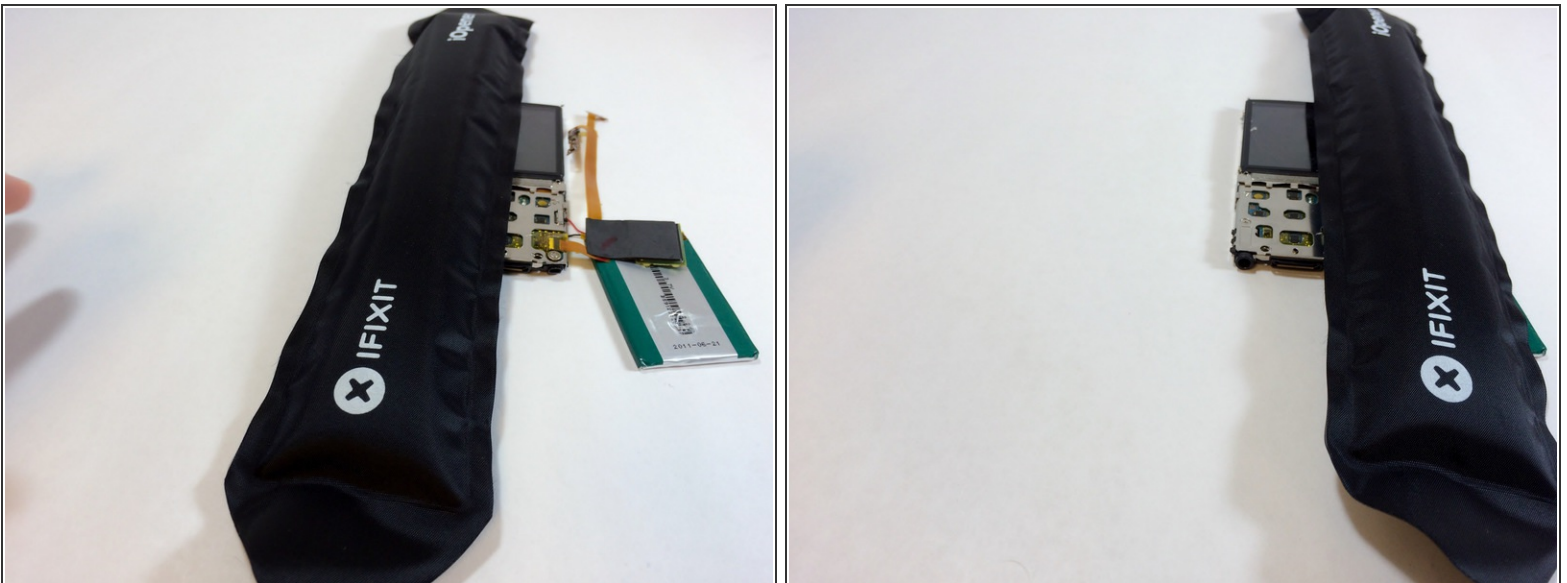


- To remove the LCD display cover, first melt the glue with the iOpener tool.
- For more detailed instructions on how to use the iOpener, see [iOpener Instructions](#)

Step 21

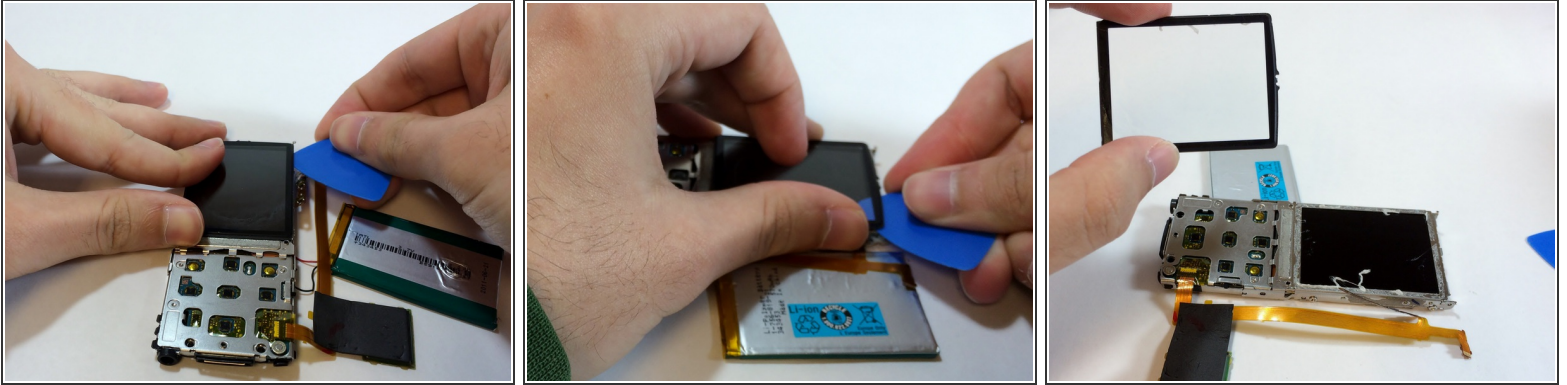


- Carefully slide the iOpener wedge tool under the edge of the LCD display cover to separate it from the device.
- Slide the wedge under all edges of the cover.
- Once all of the glue has been broken, you can pull up on the cover to remove it.
- The flat side of the spudger tool also works for this step

Step 22

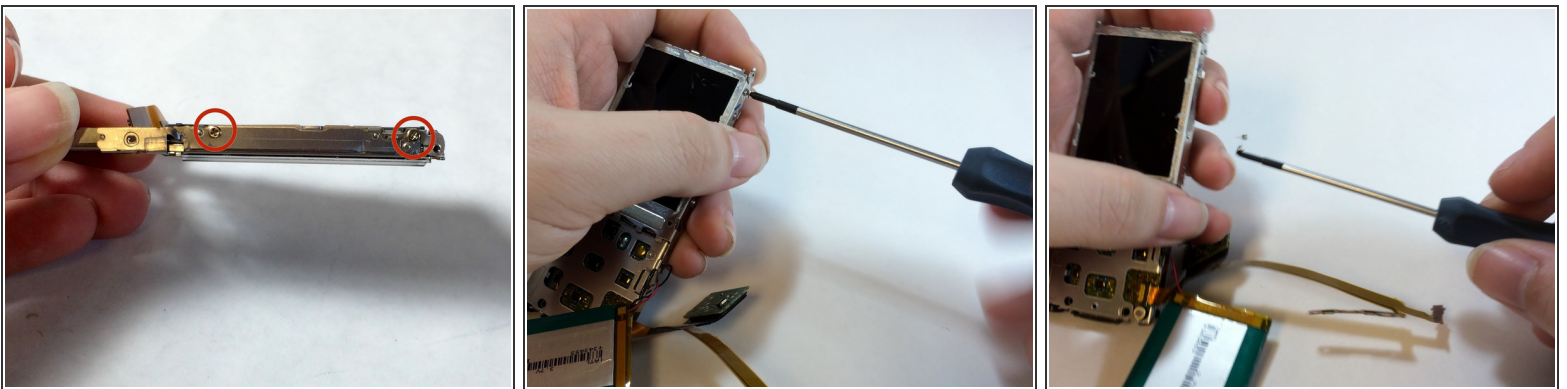


- Remove the two 1.8 mm Phillips screws from both sides of the frame.

Step 23

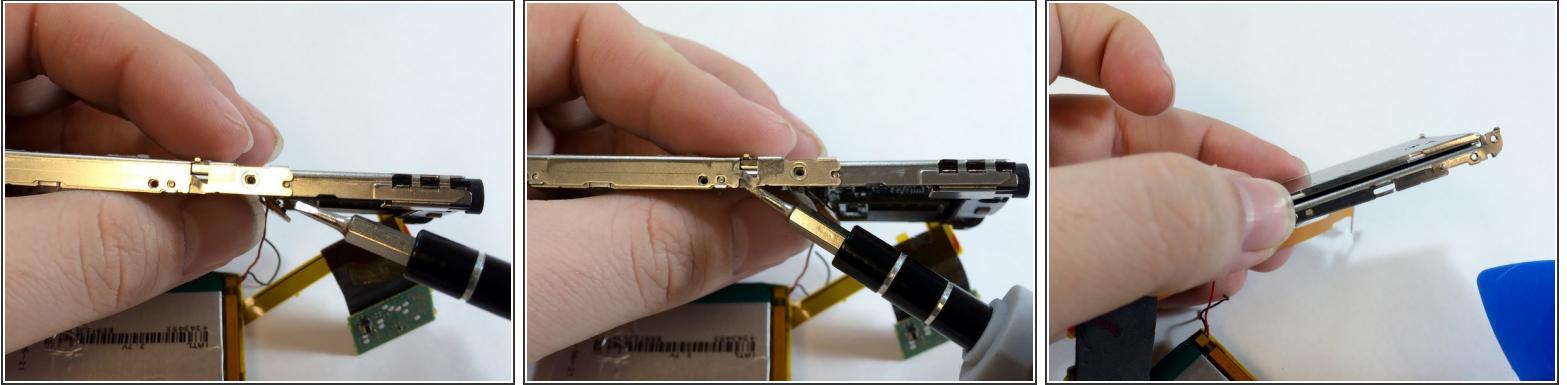



- Use a strong pry tool to lift the metal brackets away from the device. You will need to bend the metal slightly to remove it from the dimples.
- ☒ This step will require slight force to separate the frame. Do not bend the brackets too far so that they can be replaced later.
- Once separated, pull the innermost frame containing the LCD display away from the brackets.

Step 24

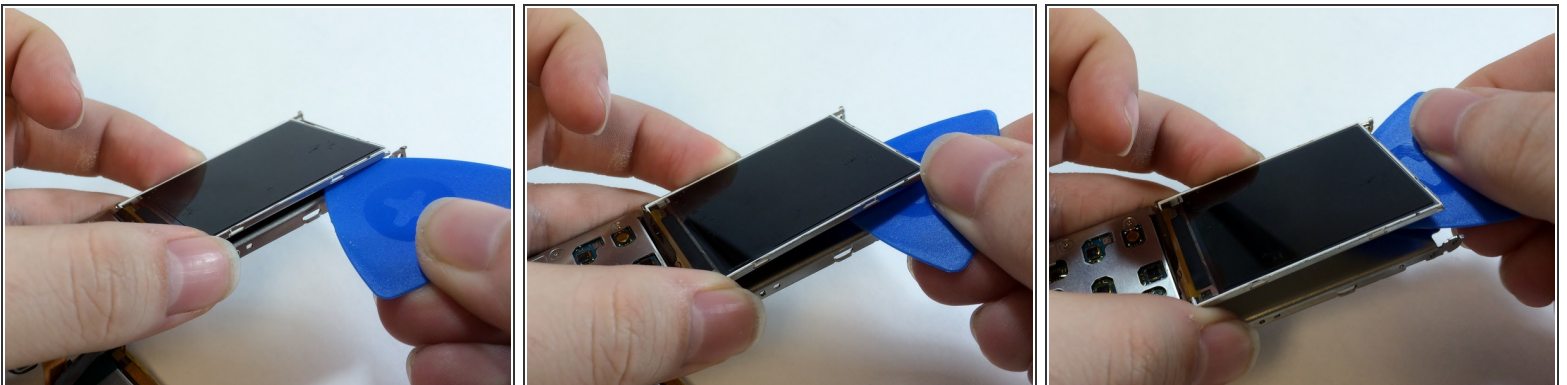

- Slide an opening pick under the LCD display to separate it from the rest of the device.
- ⓘ The pry tool also works for this step.

Step 25

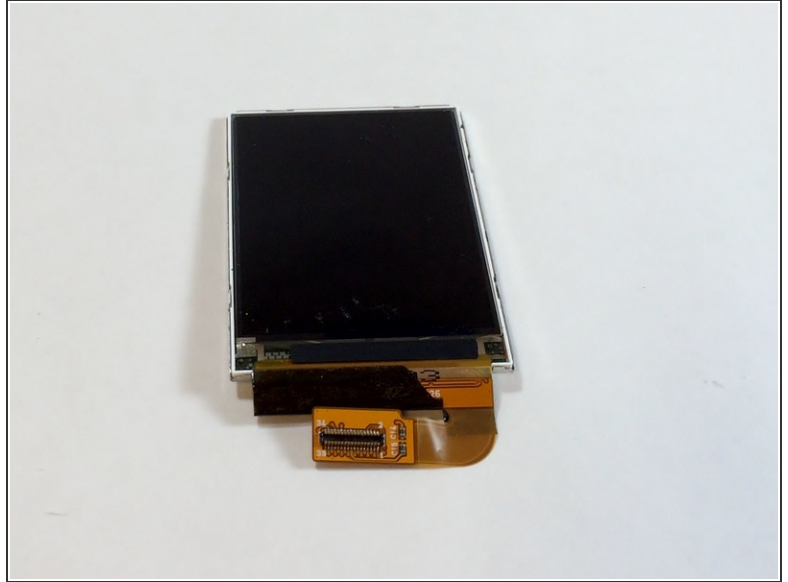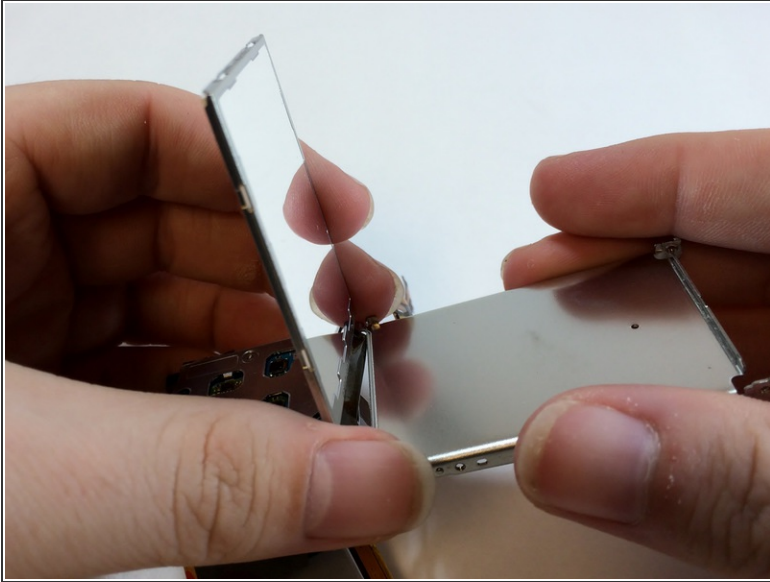

- Lift the LCD display off of the frame to remove it from the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-10 09:11:14 PM.